

3.2x2.5 SMD Crystal

FEATURE

- Rugged AT-cut crystal construction.
- Miniature 3.2x2.5mm ceramic package.
- Designed for automatic mounting and reflow soldering.
- Embossed tapping specification.
- Pb-free and RoHS/Green compliant.

APPLICATIONS

- Ideally suited designed for Bluetooth wireless communication sets, HDD, DSN, PDA, GPS, Digital Tuner, Wireless LAN and mobile phone.



Electrical Specifications 电气参数


型号	Holder Type	3.2x2.5mm Ceramic Surface Mount
频率范围	Frequency Range	8.000MHz to 54.000MHz
调整频差	Frequency Tolerance (ΔF) (at 25°C)	± 10 ppm to ± 30 ppm
温度频差	Frequency Drift	± 10 ppm to ± 30 ppm※(See Notes)
工作温度范围	Operating Temperature Range	-20°C - +70°C / -40°C - +85°C
储存温度范围	Storage Temperature Range	-40°C - +85°C / -55°C - +125°C
老化	Aging (25°C)	± 3 ppm/ year max.
静电容	Shunt Capacitance (C0)	3pF max.
激励功率	Drive Level	10 μ W (100 μ W max.)
绝缘阻抗	Insulation Resistance (Rs)	500 Megaohms Minimum at D.C100V
负载电容	Load Capacitance (CL)	Suggested by customer

※Notes: ± 10 , ± 20 , ± 30 ppm (-20°C to +70°C)
 ± 20 , ± 30 , ± 50 ppm (-40°C to +85°C) or depends on customer

Equivalent Series Resistance and Mode of Operation 等效阻抗和振荡模式


Frequency Range 频率范围	ESR (Ω) 等效阻抗	Mode 振荡模式
8.000MHz $\leq f < 12.000$ MHz	250 max	Fundamental
12.000MHz $\leq f < 16.000$ MHz	100 max	Fundamental
16.000MHz $\leq f < 20.000$ MHz	80 max	Fundamental
20.000MHz $\leq f < 24.000$ MHz	60 max	Fundamental
24.000MHz $\leq f < 54.000$ MHz	40 max	Fundamental

Reflow Condition(回流焊条件)

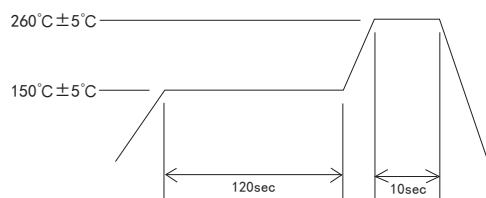

CYCLE TIME: 200sec Max.

Mechanical Dimensions 外型尺寸

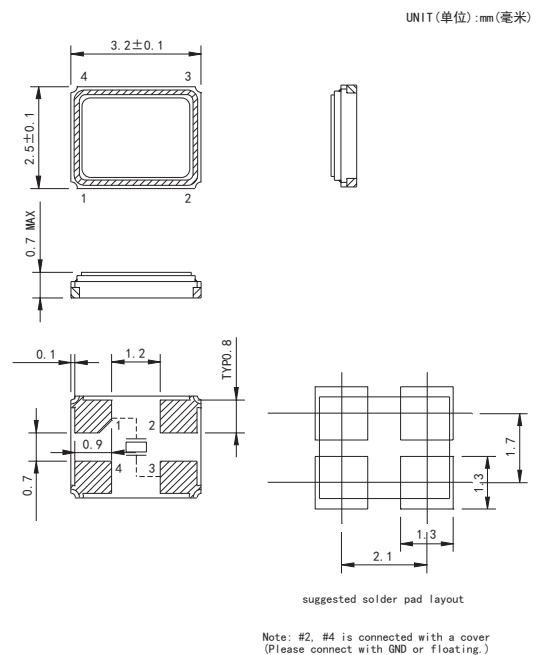

地址: 深圳市宝安区航城街道三围工业路17号3栋402

Address: Room 402, Building 3, No. 17, Sanwei Industrial Road, Hangcheng Street, Bao'an District, Shenzhen

电话: 0755-29553083

网址: www.szcfelc.com

Tel.: 0755-29553083

Web: www.szcfelc.com